


WALL LIGHT enl-WL840



The WL840 is a decorative LED Wall Light suitable for indoor & outdoor lighting applications where directional downward light throw is required

FEATURES

- Aluminium housing for heat dissipation
- IP65 - Weather protection
- IK08 - Impact protection
- Directional light throw - reduce light pollution

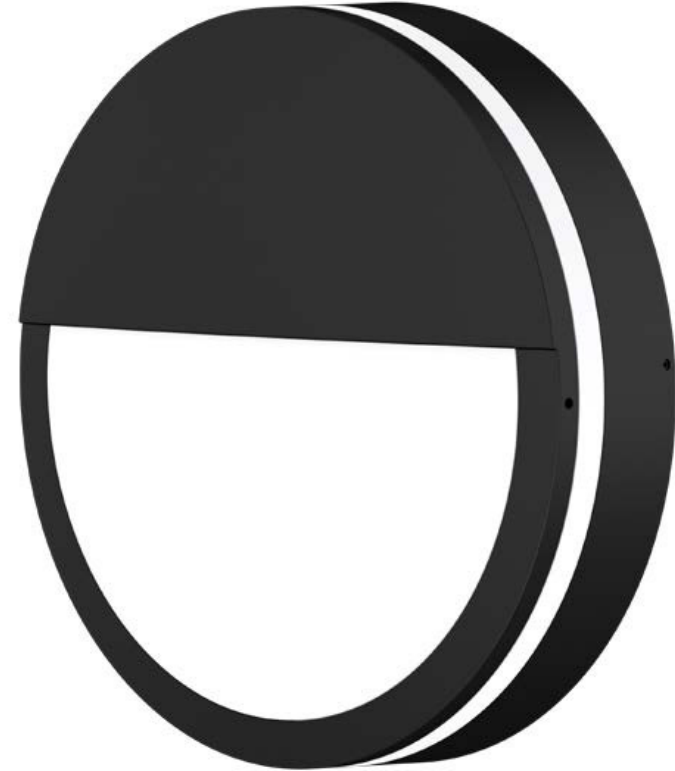

WALL LIGHT enl-WL840




PRODUCT RANGE

Model #	Rated Power (W)	Luminous Flux (lm)	Dimensions(mm)	Weight (kg)
enl-WL840-12-8yy	12	720	251 x 76	1.5
enl-WL840-18-8yy	18	1300		

yy stands for CCT. Use 30 for 3000K, 40 for 4000K.

DIMENSIONS

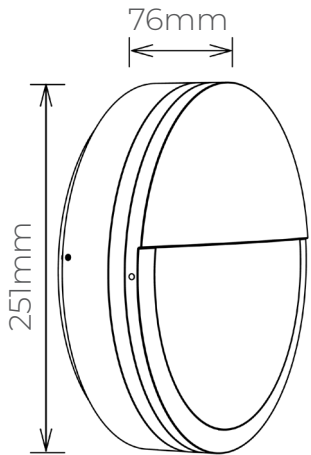

TECHNICAL INFORMATION

Optical

Light source	LED
CRI	Ra>80
Beam Angle	120°
CCT	3000K, 4000K

Electrical

Power consumption	12W or 18W
Operating voltage & frequency	120-240 VAC , 50/60 Hz
Power factor	>0.9

Environmental

IP rating	IP65
IK rating	IK08
Ambient temperature range	-20°C to + 45°C
Material Composition (body)	Aluminium Die-casting
Fixture Colour	Black (RAL9005)

Expected Lifespan >54,000hrs @L70

Warranty* 5 years

Data subject to change without notice
* Refer to warranty policy

COMPLIANCE

The enl-WL840 meets all relevant standards and regulatory requirements.



www.enlighten.com.au | 1800 365 444



Ver 2

enLighten Australia Pty Ltd
3/12 Frederick St, St Leonards, NSW 2065