

# CANOPY LIGHT enl-WL850



The WL850 LED Canopy Light is an excellent choice for an IP65 rated outdoor ceiling mounted light. Suitable in warehouses, underground car parks, petrol stations and shopping centres.

## FEATURES

- Efficacy up to 150lm/W
- IP65 - Weather protection
- IK08 - Impact protection

## OPTIONS

- Beam angle options available
- Mounting options available



90 Degree Angle



120 Degree Angle

# CANOPY LIGHT enL-WL850




## PRODUCT RANGE


Model #	Rated Power (W)	Luminous Flux (lm)	Dimensions (mm)	Weight (kg)
enL-WL850-75-7yy-zz	75	11250	370x369x65	3.9
enL-WL850-100-7yy-zz	100	15000		
enL-WL850-120-7yy-zz	120	18000		

yy stands for CCT. Use 30 for 3000K, 40 for 4000K, 50 for 5000K  
 zz stands for Beam Angle. Use 90 or 120  
 DALI-2 option available. Please contact enLighten for details.

## DIMENSIONS

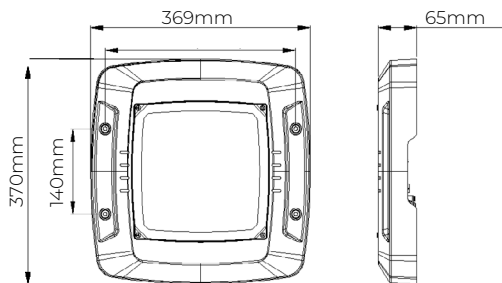

## PHOTOMETRICS

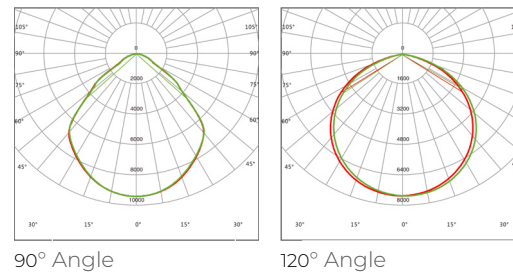

## TECHNICAL INFORMATION

Optical	
Light source	LED
CRI	Ra>70
Beam Angle	90°, 120°
CCT	3000K, 4000K, 5000K
Luminaire efficacy	Up to 150lm/W
Electrical	
Power consumption (W)	75, 100 or 120
Operating voltage & frequency	120-240VAC, 50/60 Hz
Power factor	>0.9
Environmental	
IP rating	IP65
IK rating	IK08
Ambient temperature range	-30°C to + 50°C
Material Composition (body)	ADC12 Aluminium
Fixture Colour	White (RAL 9016)
<b>LED Lifespan</b>	>54,000hrs @L70
<b>Controls</b>	DALI-2 (optional)
<b>Accessories</b>	Adapter Plate, Ceiling Mounting Bracket
<b>Warranty*</b>	5 years

Data subject to change without notice  
 \* Refer to warranty policy

## COMPLIANCE

The enL-WL850 meets all relevant standards and regulatory requirements.



[www.enlighten.com.au](http://www.enlighten.com.au) | 1800 365 444



Ver 4

enLighten Australia Pty Ltd  
 3/12 Frederick St, St Leonards, NSW 2065

# CANOPY LIGHT enL-WL850



## ACCESSORIES

Name	Item	Part Number	Description	Dimensions
Ceiling Mounting Bracket		enL-WL850-CMB	Ceiling Mount with conduit entry	
Adapter Plate		enL-WL850-AP	Surface Mount with adapter plate	

## COMPLIANCE

The enL-WL850 meets all relevant standards and regulatory requirements.

