

CANOPY LIGHT enl-WL850



The WL850 LED Canopy Light is an excellent choice for an IP65 rated outdoor ceiling mounted light. Suitable in warehouses, underground car parks, petrol stations and shopping centres.

FEATURES

- Efficacy up to 150lm/W
- IP65 - Weather protection
- IK08 - Impact protection

OPTIONS

- Beam angle options available



90 Degree Angle



120 Degree Angle

CANOPY LIGHT enL-WL850




PRODUCT RANGE


Model #	Rated Power (W)	Luminous Flux (lm)	Dimensions (mm)	Weight (kg)
enl-WL850-75-7yy-zz	75	11250	370x369x65	3.9
enl-WL850-100-7yy-zz	100	15000		
enl-WL850-120-7yy-zz	120	18000		

yy stands for CCT. Use 30 for 3000K, 40 for 4000K, 50 for 5000K
 zz stands for Beam Angle. Use 90 or 120

DIMENSIONS

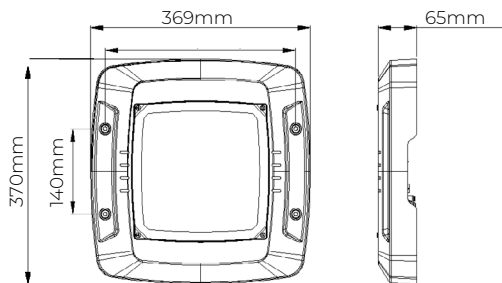

PHOTOMETRICS

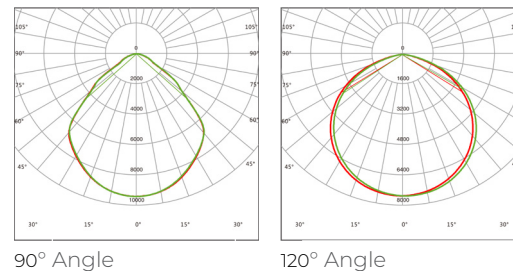

TECHNICAL INFORMATION

Optical

Light source	LED
CRI	Ra>70
Beam Angle	90°, 120°
CCT	3000K, 4000K, 5000K
Luminaire efficacy	Up to 150lm/W

Electrical

Power consumption (W)	75, 100 or 120
Operating voltage & frequency	120-240VAC, 50/60 Hz
Power factor	>0.9

Environmental

IP rating	IP65
IK rating	IK08
Ambient temperature range	-30°C to + 50°C
Material Composition (body)	ADC12 Aluminium
Fixture Colour	White (RAL 9016)

LED Lifespan	>54,000hrs @L70
Warranty*	5 years

Data subject to change without notice
 * Refer to warranty policy

COMPLIANCE

The enl-WL850 meets all relevant standards and regulatory requirements.



www.enlighten.com.au | 1800 365 444



Ver 2

enLighten Australia Pty Ltd
 3/12 Frederick St, St Leonards, NSW 2065