

# CLEANROOM PANEL enl-CP650



The CP650 is an IP54 rated panel suitable for cleanrooms. Mounted directly onto ceilings with a seal, this panel operates in areas where maintaining a positive or negative pressure is important.

## FEATURES

- Supplied with 1.2m flex & plug
- Low Glare - less than UGR 19
- Designed to prevent build up of dust

## OPTIONS

- Sizing options - 637mm or 1237mm




# PANEL en-CP650

## PRODUCT RANGE

Model #	Rated Power (W)	Luminous Flux (lm)	Dimensions(mm)	Weight (kg)
enl-CP650-30-8yy-637	30	3600	637 x 637 x 12.5	3.1
enl-CP650-30-8yy-1237			337 x 1237 x 12.5	3.4
enl-CP650-36-8yy-637	36	4300	637 x 637 x 12.5	3.1
enl-CP650-36-8yy-1237			337 x 1237 x 12.5	3.4

yy stands for CCT. Use 30 for 3000K, 40 for 4000K, 50 for 5000K

## DIMENSIONS

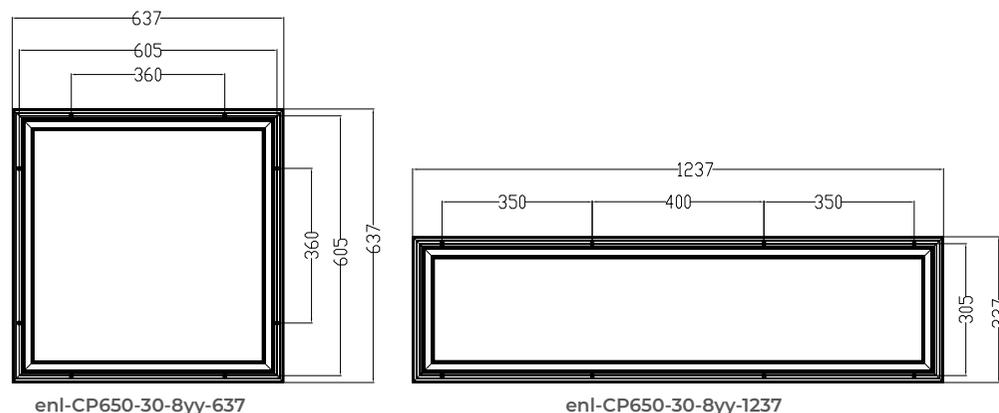

## TECHNICAL INFORMATION

### Optical

Light source	LED
CRI	Ra>80
CCT	3000K, 4000K, 5000K
Beam Angle	110°
Lumen Efficacy	Up to 120lm/W

### Electrical

Power consumption	30W or 36W
Operating voltage & frequency	220-240 VAC , 50/60Hz
Power factor	>0.9

### Environmental

IP rating	IP54
Ambient temperature range	-20°C to + 40°C
Material Composition (body)	Aluminum
Fixture Colour	White (RAL9016)

**Expected Lifespan** >54,000hrs @L70

**Warranty\*** 5 years

Data subject to change without notice  
\* Refer to warranty policy

## COMPLIANCE

The enl-CP650 meets all relevant standards and regulatory requirements.

