

# WALL LIGHT enl-WL731



The WL731 LED Wall Light is a slim and elegant design, suited to a variety of installations such as building exteriors, outdoor corridors, garages, paths and other outdoor environments. It not only provides energy efficient lighting, it delivers light on the path to ensure good visibility and comfort at all times.

## FEATURES

- **Wall mounting**, easy installation with removable back plate
- **Efficacy up to 140lm/W**
- **IP66** - Weather protection
- **IK10** - Impact resistance



# WALL LIGHT enl-WL731




## PRODUCT RANGE


Model #	Rated Power (W)	Luminous Flux (lm)	Dimensions (mm)	Weight (kg)
enl-WL731-15-8yy	15	2,100	293 x 289 x 97	2.7
enl-WL731-25-8yy	25	3,500		
enl-WL731-35-8yy	35	4,900		
enl-WL731-45-8yy	45	6,300		

yy stands for CCT. Use 30 for 3000K, 40 for 4000K.

## DIMENSIONS

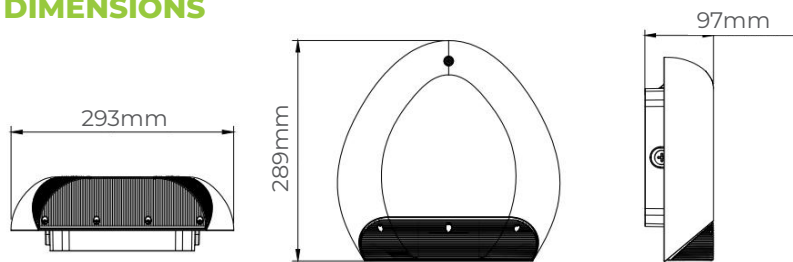

## PHOTOMETRICS

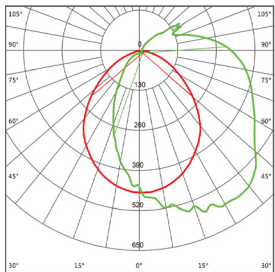

Type 4 Beam Angle

## TECHNICAL INFORMATION

### Optical

Light source	LED
CRI	Ra>80
CCT	3000K, 4000K
Luminaire efficacy	Up to 140lm/W

### Electrical

Power consumption (W)	15 - 45
Operating voltage & frequency	220-240 VAC , 50Hz
Power factor	>0.92
Surge protection	1kV line-line

### Environmental

IP rating	IP66
Impact rating	IK10
Ambient temperature range	-30°C to + 50°C
Material Composition (body)	Aluminium alloy, Polycarbonate optical lens
Fixture Colour	Black (RAL9005)

**LED Lifespan** >54,000hrs @L70

**Warranty\*** 5 years

Data subject to change without notice  
\* Refer to warranty policy

