

DOWNLIGHT enI-DL905



The DL905 is a low glare LED Downlight with a wide range of power options. It also has the alternative of being surface mounted. Designed for Offices, Receptions, Corridors, Staff Rooms and Toilets

FEATURES

- Efficacy up to 130lm/W
- IP54 - Ingress Protection
- Supplied with a 1.2m Flex and Plug

OPTIONS

- Surface Mount Kit available for certain fittings
- Black or White colour options available
- DALI-2 or Casambi control options available




DOWNLIGHT enL-DL905

PRODUCT RANGE

Model #	Rated Power (W)	Luminous Flux (lm)	Surface Mountable	Dimensions(mm)			Cutout (mm)	Weight (kg)
				A	B	C		
enL-DL905-7-8yy-85-c	7	700	N/A	Ø85	Ø68	49	Ø65-75	0.2
enL-DL905-10-8yy-110-c	10	1080	N/A	Ø110	Ø86	52	Ø90-95	0.3
enL-DL905-12-8yy-145-c	12	1420	Yes	Ø145	Ø115	53	Ø120-130	0.5
enL-DL905-18-8yy-145-c	18	2010						
enL-DL905-18-8yy-170-c		18	2350	N/A	Ø170	Ø136	53	Ø140-150
enL-DL905-25-8yy-170-c	25		3100					
enL-DL905-18-8yy-190-c	18	2350	Yes	Ø190	Ø155	53	Ø160-170	0.7
enL-DL905-25-8yy-190-c	25	3100						
enL-DL905-18-8yy-228-c	18	2350	Yes	Ø228	Ø194	53	Ø200-210	1
enL-DL905-25-8yy-228-c	25	3300						
enL-DL905-35-8yy-228-c	35	4680						

yy stands for CCT. Use 27 for 2700K, 30 for 3000K, 40 for 4000K or 50 for 5000K.
c stands for Fixture Colour. Use B for Black or W for White

DIMENSIONS

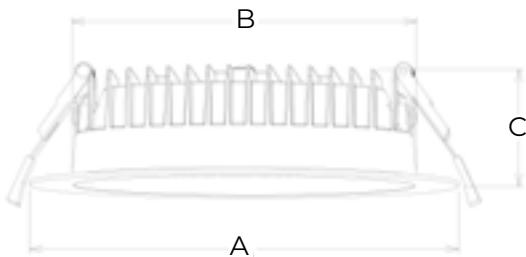

COMPLIANCE

The enL-DL905 meets all relevant standards and regulatory requirements.



TECHNICAL INFORMATION

Optical

Light source	LED
CRI	Ra>80
Beam Angle	90°
CCT	3000K, 4000K, 5000K
Luminaire efficacy	Up to 130lm/W

Electrical

Power consumption	7W - 35W
Operating voltage & frequency	220-240 VAC , 50/60 Hz
Power factor	>0.9

Environmental

IP rating	IP54(Below Ceiling), IP40(Inside Ceiling)
Ambient temperature range	-20°C to + 45°C
Material Composition (body)	Aluminium Die-casting
Fixture Colour	White (RAL9016) or Black (RAL9005)

Expected Lifespan >54,000hrs @L70

Controls - Optional DALI-2 / Casambi

Warranty* 5 years

Data subject to change without notice
* Refer to warranty policy

DOWNLIGHT enI-DL905




ACCESSORIES

Available for 145, 190 or 228 sized models, Please order separately

Model #	Dimensions(mm)			Weight (kg)
	A	B	C	
enI-DL905-145-SM-c	Ø145	93	Ø148	0.4
enI-DL905-190-SM-c	Ø190		Ø193	0.5
enI-DL905-228-SM-c	Ø228	100	Ø232	0.6

c stands for Fixture Colour. Use B for Black or W for White

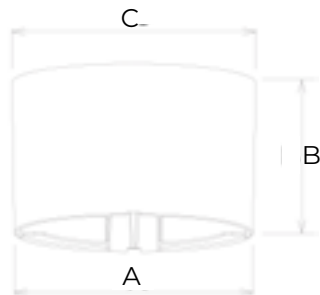

COMPLIANCE

The enI-DL905 meets all relevant standards and regulatory requirements.

