

LINEAR LIGHT en-LI102




The LI102 is a sleek and elegant LED Linear Light designed for a wide range of interior designs that require a fitting with both upwards and downwards light throws.

FEATURES

- Efficacy of 120lm/W
- Direct & Indirect lighting design

OPTIONS

- Sizing Options - 1200mm or 1600mm
- Colour Options - White or Black

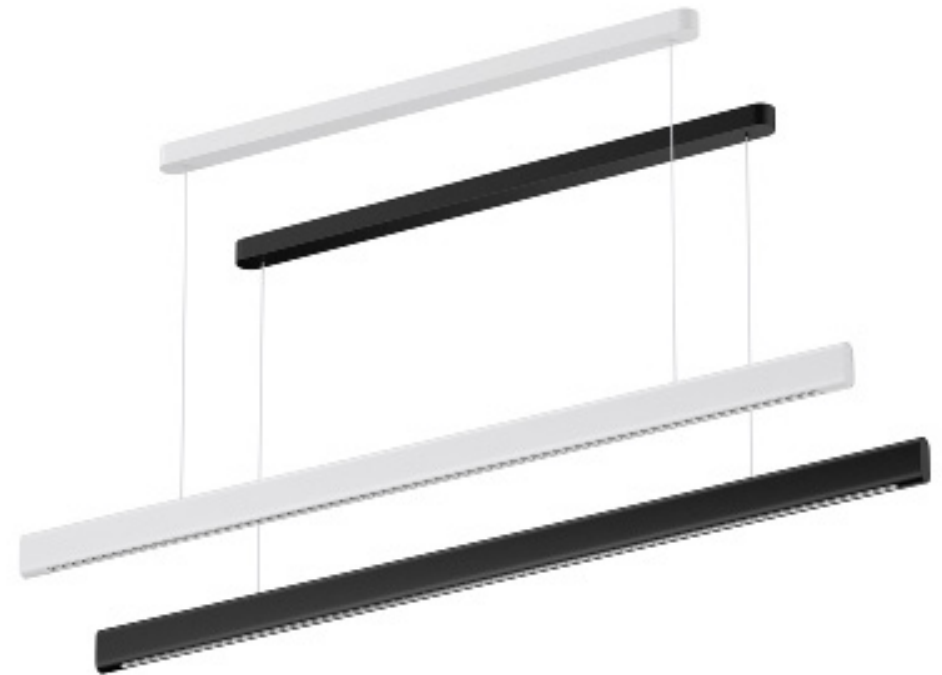


LINEAR LIGHT en-LI102

PRODUCT RANGE

Model #	Rated Power (W)	Luminous Flux (lm)	Dimensions(mm)						Weight (kg)
			A	B	C	D	E	F	
enl-LI102-30-8yy-1200	30	3080 Down 770 Up	1200	25	59	30	37	797	1.7
enl-LI102-36-8yy-1200	36	3440 Down 860 Up							
enl-LI102-36-8yy-1600		40	3840 Down 960 Up	1572	25	59	30	37	1169
enl-LI102-40-8yy-1600	42		4160 Down 1040 Up						
enl-LI102-42-8yy-1600	50	4800 Down 1200 Up	1572	25	59	30	37	1169	2.2
enl-LI102-50-8yy-1600		50							

yy stands for CCT. Use 30 for 3000K, 40 for 4000K, 50 for 5000K.

DIMENSIONS

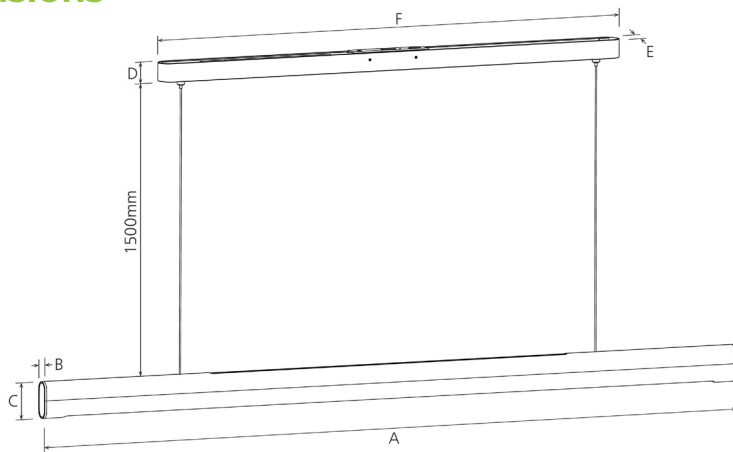

COMPLIANCE

The enl-LI102 meets all relevant standards and regulatory requirements.



TECHNICAL INFORMATION

Optical

Light source	LED
CRI	Ra>80
Beam Angle	60° Down, 110° Up
CCT	3000K, 4000K, 5000K
Luminaire efficacy	Up to 120lm/W

Electrical

Power consumption	30W - 50W
Operating voltage & frequency	220-240 VAC , 50/60 Hz
Power factor	>0.9

Environmental

IP rating	IP20
Ambient temperature range	-20°C to + 45°C
Material Composition (body)	Aluminium
Fixture Colour	White (RAL 9016) / Black (RAL9005)

Expected Lifespan >54,000hrs @L70

Warranty* 5 years

Data subject to change without notice
* Refer to warranty policy